

# Frame specification

The minimal thickness of Van Ruysdael glass means that it will fit into the original window frames.


These examples show two possibilities of installation and the rebate dimension in relation to the thickness of the glass. Make sure that in the case of a renovation or an identical reconstruction, the rebate meets these dimensions.

For installation with mastic finish the two types of mastic Performance and Detail are required. Installation with glazing beads only requires the Performance.

Do not hesitate to ask for advice for your project.



## Installation with mastic finish

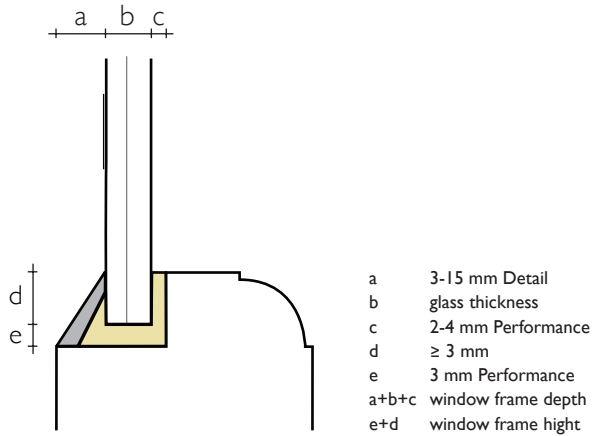

## Installation with glazing beads

